



SMALL ROOFTOP ARRAYS
ON COMMERCIAL /
INDUSTRIAL BUILDINGS



ROOF-PARALLEL FLAT
ROOF INSTALLATIONS

CIGS SOLAR MODULE

Q.SMART UF L 90-1 10

Sophisticated design for a broad range of applications

Q-Cells is now applying the skills perfected over years of solar cell manufacture to solar module production. Thanks to their large format, the frameless **Q.SMART UF L** solar modules offer output of up to 110 Wp. The reliable „Made in Germany“ quality and the particularly appealing design qualify them for ambitious rooftop arrays and building-integrated installations alike.

QUALITY „MADE IN GERMANY“ FOR HIGHLY RELIABLE YIELDS

- Surface area of 0.94 m² for high output of up to 110 Wp
- High yields due to good temperature behavior and low-light performance
- Particularly efficient, even in cases of partial shading and unfavorable roof orientation, thanks to advantageous cell geometry
- Long-term weather resistance due to durable glass encapsulation
- Efficient self-cleaning due to lack of raised edges
- Further optimization of output due to positive sorting +5/-0 Wp

ATTRACTIVE AND AESTHETICAL VISUAL APPEARANCE

- Outstanding design with homogeneous black surface

SIMPLE, COST-EFFECTIVE INSTALLATION

- Mounting options for every inclination
- Minimal wiring effort required, as the module itself has high reverse current resistance
- Minimized system costs due to ideal format

STEADY, GUARANTEED PERFORMANCE

- 10-year product warranty
- 25-year performance warranty*
- Free module recycling through in the PV Cycle Association**



* 90% OF THE INITIAL EFFICIENCY UP TO 10 YEARS, 80% UP TO 25 YEARS (ACCORDING TO THE RESPECTIVE EFFECTIVE REGIONAL WARRANTY TERMS)
** IN PV CYCLE MEMBER COUNTRIES ONLY. SEE WWW.PVCYCLE.COM

MECHANICAL SPECIFICATION		TECHNICAL DRAWING
Format	1190 mm x 789.5 mm x 7.3 mm	
Weight	16.5 kg	
Front Cover	4 mm tempered low iron glass	
Back Cover	3 mm float glass	
Frame	None	
Cell Type	CIGS [Cu(In, Ga) Se ₂]	
Junction box	Protection class IP 65, with bypass diode	
Cable length	(+) 770 mm; (-) 650 mm	
Cable type	Solar cable 1.5 mm ²	
Connector	MC4	

ELECTRICAL CHARACTERISTICS


PERFORMANCE AT STANDARD TEST CONDITIONS (STC: 1000 W/m², 25 °C, AM 1.5 SPECTRUM)¹⁾

POWER CLASS			90	95	100	105	110
Nominal Efficiency	η	[%]	9.6	10.1	10.6	11.2	11.7
Nominal Power (+5/-0 Wp)	P_{MAX}	[W]	90.0	95.0	100.0	105.0	110.0
Short Circuit Current	I_{SC}	[A]	1.63	1.63	1.63	1.63	1.65
Open Circuit Voltage	V_{OC}	[V]	90.1	90.7	91.8	93.1	94.7
Current at Maximum Power	I_{MPP}	[A]	1.38	1.42	1.44	1.47	1.49
Voltage at Maximum Power	V_{MPP}	[V]	65.2	66.9	69.4	71.5	73.8

PERFORMANCE AT NORMAL OPERATING CELL TEMPERATURE (NOCT: 800 W/m², 51 ± 2 °C, AM 1.5 SPECTRUM)


POWER CLASS			90	95	100	105	110
Nominal Power	P_{MAX}	[W]	65.1	68.8	72.4	76.0	79.6
Short Circuit Current	I_{SC}	[A]	1.30	1.30	1.30	1.30	1.32
Open Circuit Voltage	V_{OC}	[V]	81.9	82.4	83.4	84.6	86.1
Current at Maximum Power	I_{MPP}	[A]	1.10	1.13	1.15	1.17	1.19
Voltage at Maximum Power	V_{MPP}	[V]	59.1	60.7	62.9	64.8	66.9

PERFORMANCE AT LOW IRRADIANCE

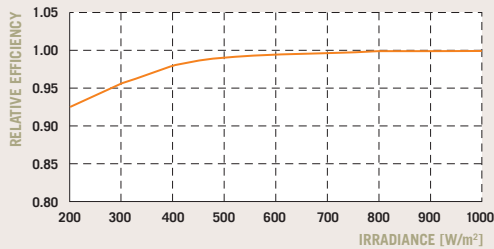

The typical relative change in module efficiency at an irradiance of 200 W/m² in relation to 1000 W/m² (both at 25 °C and AM 1.5 spectrum) is -7%.

CHARACTERISTICS AT DIFFERENT TEMPERATURES AND IRRADIANCES

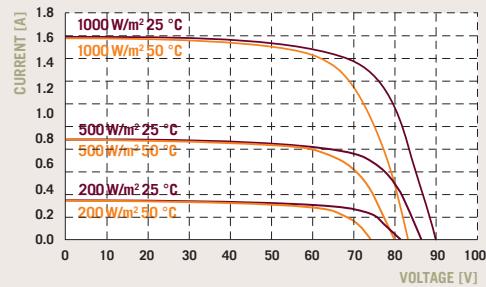

TEMPERATURE COEFFICIENTS (AT 1000 W / M², AM 1.5 SPECTRUM)

Temperature Coefficient of I_{SC}	α	[%/K]	-0.01 ± 0.04	Temperature Coefficient of V_{OC}	β	[%/K]	-0.30 ± 0.04
Temperature Coefficient of P_{MAX}	γ	[%/K]	-0.38 ± 0.04				

¹⁾ The power classes are defined by positive sorting (+5W-0W) according to measured P_{max} under STC. The accuracy of this measurement is ± 3 %. I_{sc} , V_{oc} , I_{mpp} , V_{mpp} are within ± 10 % of the indicated values under STC. Valid indoor measurement of STC performance is obtained by pretreating the modules before measurement with 1 hour light soak (at approx. 1000 W/m² in open circuit) followed by cool down to 25 °C.

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage V_{SYS}	[V]	1000 (IEC) / 600 (UL 1703)	Safety Class	II
Maximum Reverse Current I_R	[A]	5.0	Fire Rating	C
Wind / Snow Load	[Pa]	2400	Permitted module temperature on continuous duty	-40 °C up to +85 °C

QUALIFICATIONS AND CERTIFICATES

IEC 61646 (Ed. 2); IEC 61730 (Ed. 1) Application Class A; UL 1703 (pending)

PARTNER



NOTE: Installation instructions must be followed. See the installation and operating manual or contact the technical service for further information on approved installation and use of this product.

Q-CELLS SE

OT Thalheim, Sonnenallee 17–21
06766 Bitterfeld-Wolfen, Germany

TEL +49 (0)3494 66 99-0
FAX +49 (0)3494 66 99-199

EMAIL service@q-cells.com
WEB www.q-cells.com



Specifications subject to technical changes © Q-Cells SE Q.Smart_LF_L_Englisch_08/2010_03_G1.0